


PLAN

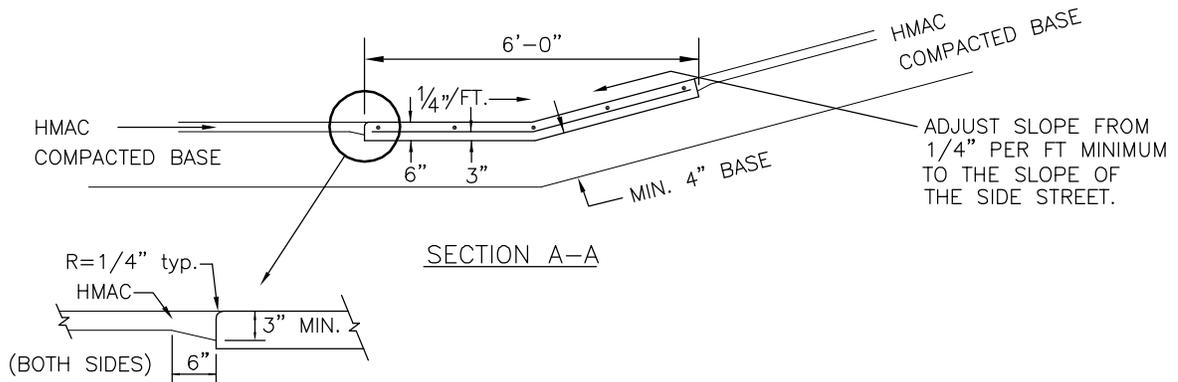

GENERAL NOTES

1. MATERIALS AND CONSTRUCTION METHODS SHALL CONFORM TO THE CITY OF LAMPASAS STANDARD SPECIFICATIONS.
2. CONCRETE SHALL BE AS NOTED ON DESIGN DRAWINGS.
3. MONOLITHIC CURB AND GUTTER SHALL BE MEASURED BY PLAN SQUARE FEET AND PAID AS VALLEY GUTTER
4. THE UPSTREAM CURB MID POINT MUST BE AT OR LOWER THAN THE BEGINNING PC AND .5% (MIN.) HIGHER THAN THE OPPOSING MP.
6. IF TRAFFIC MUST BE MAINTAINED, A CONSTRUCTION JOINT IS TO BE INSTALLED LONGITUDINALLY FROM THE STREET TO THE END OF THE DRIVEWAY.

DETAIL DEPICTS DIMENSIONAL REQUIREMENTS. THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR THE APPROPRIATE USE OF THIS STANDARDS.



CONCRETE VALLEY GUTTER

STANDARD CONSTRUCTION DETAILS  
PAVING

DATE:  
MARCH 2007

SCALE:  
NTS

SHEET:  
SD-P18