



ANCHOR ENCLOSURE TO PAVEMENT IN ACCORDANCE WITH MFG'S INSTRUCTIONS USING TYPE 316 STN. STL. CONC ANCHOR BOLTS

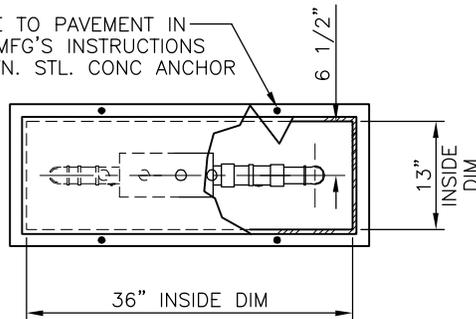


PLAN VIEW

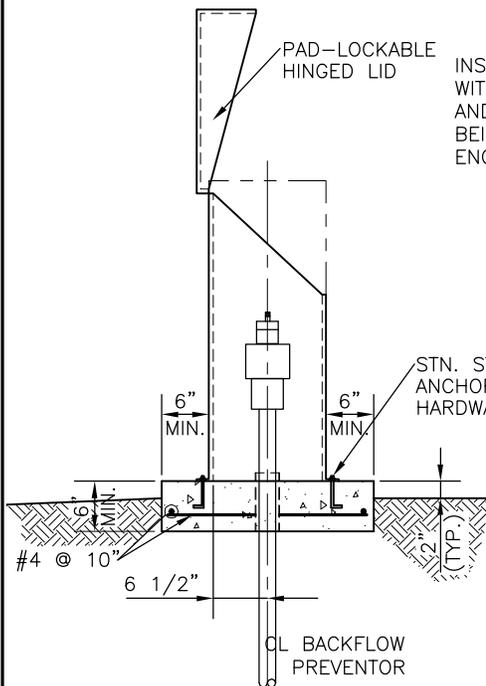

SIDE VIEW

INSULATED ENCLOSURE, TWO PIECE BOX WITH PAD-LOCKABLE HINGED LID, DRAINAGE AND GROUND ANCHOR CAPABILITY; COLOR - BEIGE; WATTS ES-WB INSULATED BACKFLOW ENCLOSURE OR APPROVED EQUAL.

REDUCED PRESSURE BACKFLOW PREVENTION ASSEMBLY, WATTS REGULATOR MODEL NO. 909-QT OR APPROVED EQUAL

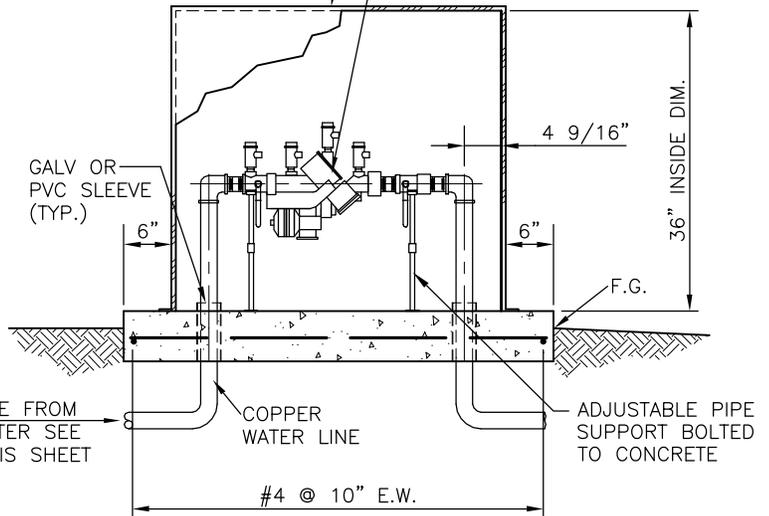

FRONT VIEW

NOTES:

1. ALL ITEMS SHOWN HEREON SHALL CONFORM TO PROJECT SPECIFICATIONS
2. INSTALLED ENCLOSURE NOT REQUIRED FOR ASSEMBLIES LESS THAN 2" DIAMETER.

DETAIL DEPICTS DIMENSIONAL REQUIREMENTS. THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR THE APPROPRIATE USE OF THIS STANDARDS.



REDUCED PRESSURE
BACKFLOW ASSEMBLY

STANDARD CONSTRUCTION DETAILS
WATER

DATE:
MARCH 2007

SCALE:
NTS

SHEET:
SD-W10